

## PC Classroom One Page Setup

### Connecting an Output Device

*\*Connecting a device via HDMI OR VGA requires using the HDMI/ VGA connector located in the front of the classroom. \**

#### HDMI/VGA Connections

- Connect the HDMI cable from the wall to the HDMI port on your device  
OR connect the VGA cable from the wall to the VGA port on your device.
- Power on the laptop, log on, and share/mirror screen on your device.



VGA



HDMI

### Starting the Crestron Touch Panel Display with Source (VGA/HDMI)

- On the Crestron Touch Panel, touch the screen to start.  
"A/V System Starting Please Wait" will appear on the touch panel.

*\*At this time, the projector will come into focus. \**

- Select HDMI or VGA as the source to be displayed.

*\*At this time, your device will be displayed. \**



### Using the Crestron Touch Panel


#### Blanking/Unblanking the projector

- To blank the projector, select "Press Blank Projector."  
The "Press To Blank Projector" button will now turn **blue**.
- To Unblank the projector, select "Press To Unblank Projector."

#### Raising and lowering the Volume

*\*First, ensure the volume level on your device is unmuted. \**

- To raise the volume, select "VOL UP."
- To lower the volume, select "VOL DOWN."
- To mute, select "MUTE."
- The "MUTE" button will now turn **blue**.
- To unmute, select the "MUTE" button.
- The "MUTE" button will now turn back to the original color.

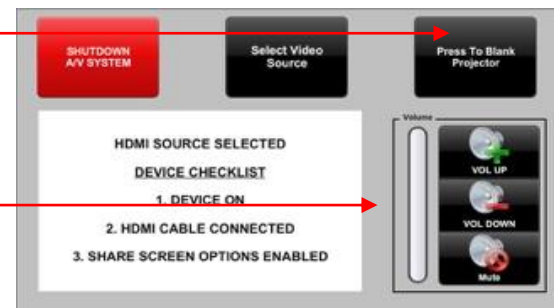

#### Shutting down the A/V System

- To shutdown the A/V system, select "SHUTDOWN A/V SYSTEM."  
"Are you sure you want to shutdown the A/V System" will now be displayed.
- To continue shutdown, select "YES, SHUTDOWN A/V SYSTEM."  
"Shutting down A/V system will appear" and the projector will shut off.
- To cancel shutdown, select "NO, CANCEL A/V SYSTEM SHUTDOWN."



## MAC Classroom One Page Setup

### Connecting an Output Device

\* Connecting a device via MAC requires using the HDMI/ VGA connector located in the front of the classroom, along with bringing your **own** Apple HDMI/VGA connector. \*



Apple  
HDMI/VGA  
connector

### HDMI/VGA Connections

- Connect either HDMI OR VGA cable on the wall to the HDMI OR VGA Apple Adapter to your device.
- Power on your device, sign in, and share/mirror screen.

### Starting the Crestron Touch Panel Display with Source (VGA/HDMI)

- On the Crestron Touch Panel, touch the screen to start.  
"A/V System Starting Please Wait" will appear on the touch panel.

\*At this time, the projector will come into focus. \*

- Select HDMI or VGA as the source to be displayed.

\*At this time, your device will be displayed. \*



### Using the Crestron Touch Panel


#### Blanking/Unblanking the projector

- To blank the projector, select "Press Blank Projector."  
The "Press To Blank Projector" button will now turn **blue**.
- To Unblank the projector, select "Press To Unblank Projector."

#### Raising and lowering the Volume

\*First, ensure the volume level on your device is unmuted. \*

- To raise the volume, select "VOL UP."
- To lower the volume, select "VOL DOWN."
- To mute, select "MUTE."
  - The "MUTE" button will now turn **blue**.
- To unmute, select the "MUTE" button.
  - The "MUTE" button will now turn back to the original color.

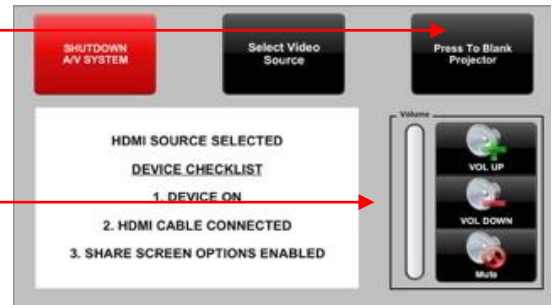

#### Shutting down the A/V System

- To shutdown the A/V system, select "SHUTDOWN A/V SYSTEM."  
"Are you sure you want to shutdown the A/V System" will now be displayed.
- To continue shutdown, select "YES, SHUTDOWN A/V SYSTEM."  
"Shutting down A/V system will appear" and the projector will shut off.
- To cancel shutdown, select "NO, CANCEL A/V SYSTEM SHUTDOWN."

